



PARTS LIST & SCHEMATIC

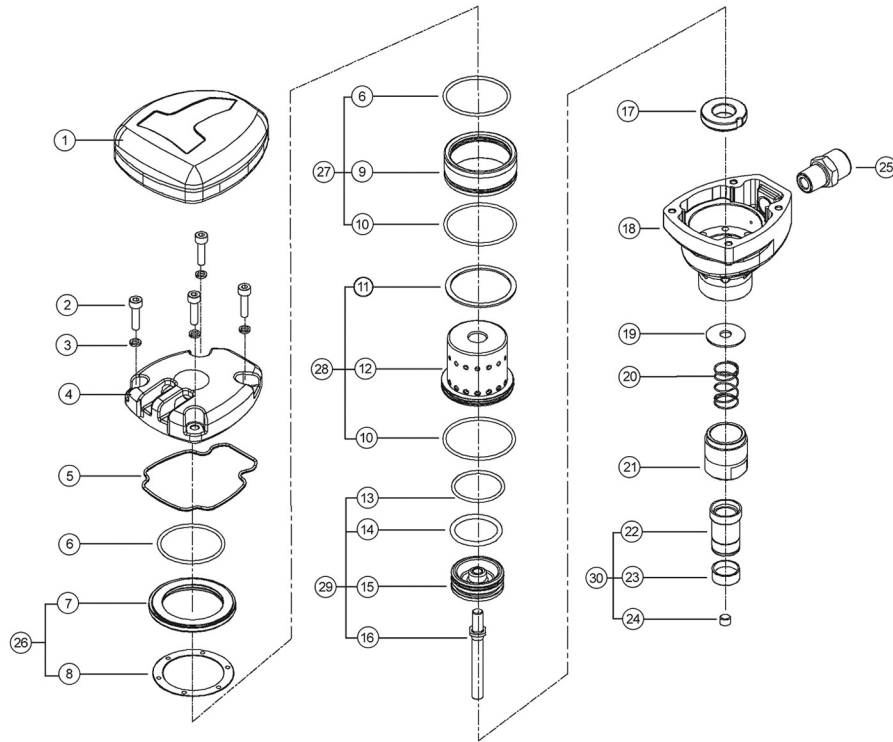

No.	Description	Qty.	No.	Description	Qty.
1	Exhaust Cover	1	16	Drive Blade	1
2	Screw	4	17	Bumper	1
3	Washer	4	18	Body	1
4	Cap	1	19	Cushion	1
5	Gasket	1	20	Spring	1
6	O-Ring	2	21	Nut	1
7	Elastic Washer	1	22	Grip	1
8	Spacer	1	23	Magnetic Steel Sleeve	1
9	Floating Valve	1	24	Magnetic Steel	1
10	O-Ring	2	25	Air Plug	1
11	Pad	1	26	Elastic Washer Set	1
12	Cylinder	1	27	Floating Valve Set	1
13	O-Ring	1	28	Cylinder Set	1
14	O-Ring	1	29	Piston Set	1
15	Piston Head	1	30	Grip Set	1

Air Locker

OPERATING INSTRUCTIONS AND PARTS MANUAL

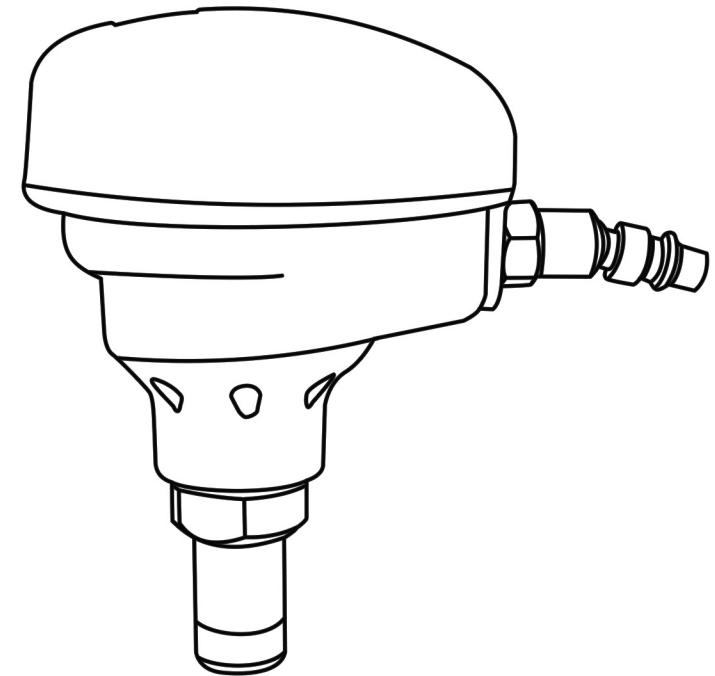

Mini Palm Nailer Model: APN50



CAREFULLY READ THIS MANUAL BEFORE OPERATING TOOL!



WARNING



NOTE: Not reading this manual before you use the tool may cause serious injury or even death!

PNEUMATIC PALM NAILER OPERATION MANUAL

Please read and fully understand this manual for the information relating to protecting your safety and preventing equipment problem.



DANGER



Indicates an immediate hazardous situation, which, if not avoided, will result in serious injury or death.



WARNING



Indicates a potentially hazardous situation, which, if not avoided, could result in serious injury or death.



NOTE



Alerts the operator to useful information.

- Read and understand the tool label and manual. Read and follow all of the instructions. Failure to follow warnings could result in serious injury or death.
- Operators and others in work area must wear safety glasses with side shields. Safety glasses must conform to the requirements of American National Standards Institute, ANSI Z87.1 and provide protection against flying particles both from the front and side.
- Keep Fingers away from the trigger when not driving fasteners, to avoid accidental firing.
- Never point the tool at any part of your, or another person's body in the work area.
- Never use oxygen, bottled gases, combustible gasses or any other reactive gas as a power source for this tool. Explosion and serious injury could result.
- Wear ear protection to safe-guard against possible hearing damage or hearing loss. Ear protection devices must conform to your local regulations.
- Use clean, dry, regulated compressed air at 70 to 120 PSI. Never connect tool to pressure which potentially exceeds 200 PSI as the tool can burst.
- Only use air hose that is rated for a working pressure of at least 200 PSI or 150% of the maximum system pressure, whichever is greater.
- Disconnect air hose from the tool before performing tool maintenance and inspection, loading fasteners, turning the adjuster and top cover, attaching or removing the nose cap, clearing a jam, it is not in use, leaving work area, moving it to another location and handing it to another person.
- Never use the tool if safety trigger or spring is inoperable, missing or damaged. Do not alter or remove safety, trigger or springs. Make daily inspections for the free movement of the trigger and safety mechanism.
- Disconnect tool from air supply before loading fastener to prevent a fastener from being fired during connection. The tool-driving mechanism may cycle when the tool is connecting to the air supply.
- Operator and bystanders should wear a protective helmet to safe-guard against possible injury.
- Do not load fastener with trigger or safety depressed to prevent unintentional firing of a fastener. Do not drive fastener close to the edge of the work piece, the work piece is likely to split which will allow the fastener to fly or ricochet, causing personal injury.
- Never fire fastener into material too hard to penetrate. Do not drive fastener on top of other fasteners, or with the tool at too steep of an angle. The fastener can again ricochet causing personal injury.
- Always carry a fastener-driving tool at the workplace using only the handgrip and never with the trigger actuated. Never carry the tool by the hose or pull the hose to move the tool.

CLEARING A JAM FROM THE TOOL



WARNING



- **Fastener jammed in fastener discharge area:** Disconnect the tool from the hose. Grab the jammed fastener with pliers and remove.

CLEANING THE TOOL




NOTE



- Always disconnect the tool before cleaning. Remove any tar build-up with WD40 Oil or a cleaning solution. Never soak the tool in any cleaning solution.

LUBRICATING THE TOOL



NOTE



- Disconnect the tool from air supply and add a few drops of air tool oil into the inlet.
- Wipe off excess oil at the exhaust. Excessive oil will damage O-rings of the tool.

OPERATING THE TOOL



NOTE



- Lubricate the tool as described above.
- Attach a high pressure air hose to the inlet of the tool.
- Regulate the air pressure to obtain the air pressure to within the recommended working pressure range outlined in this manual.
- Test for proper fastener penetration by driving few fasteners into a sample piece of wood. If the fasteners do not achieve the desired depth, adjust the air pressure to a higher setting until the desired depth is achieved.